RevNo	Revision note	Date	Signature	Checked

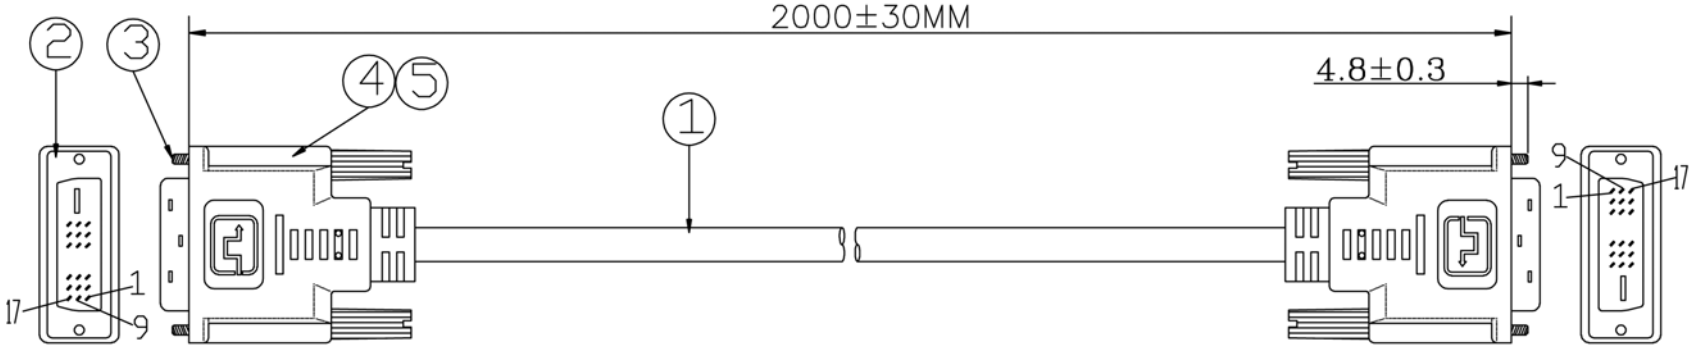

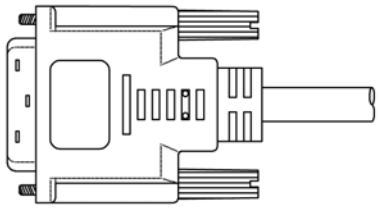

PIN OUT

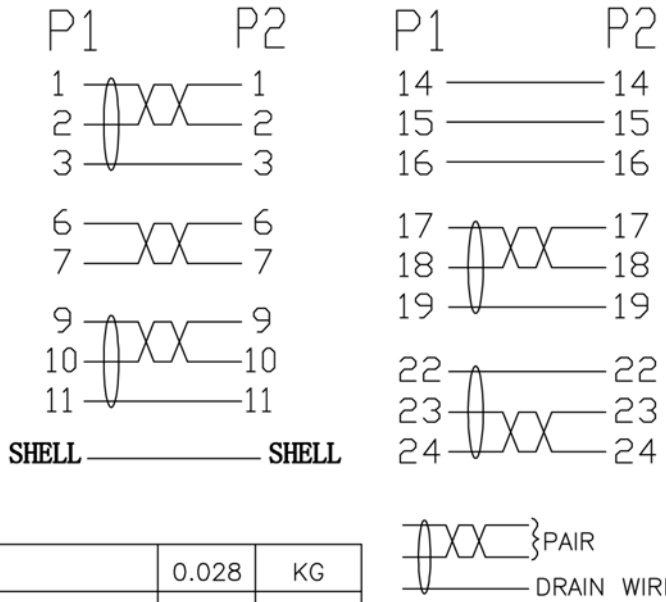

REQUIREMENTS:

1:100% short and open testing.

2:Test conditions
DC300V /10MS
Insulation resistance 10MΩ(Min)
Conduction resistance 5Ω(Max)

NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT
⑤	OUTER MOLDED	BLACK 45P PVC	0.028	KG
④	INTER MOLDED	LDPE	0.028	KG
③	SCREW	#4−40UNC 2.3*45.5MM,BLACK PVC	4	PCS
②	CONNECTOR	DVI 18+1/M BLACK INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN	2	PCS
①	CABLE	(1P*30#+D+AL+MYLAR)*4C+1P*30#+3C*30#+ADB OD:6.0±0.15 JACKET:BLACK PVC	2	M

Ltemref	Quantity	Title/Name,designation,material,dimension etc		Article No./Reference	
Designed by	Checked by	Approved by - date MARCH 4.2012	File name DVI 18+1 M/M L=2M	Date MARCH 4.2012	Scale FREE
		26-1663			
		26-1663		Edition 1	Sheet 1/2